

FIG. 1.

1/6

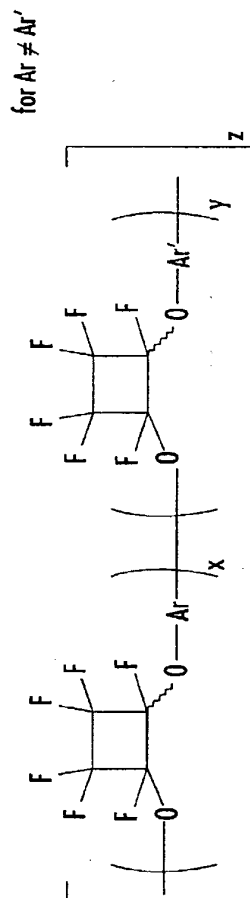







FIG. 1A.



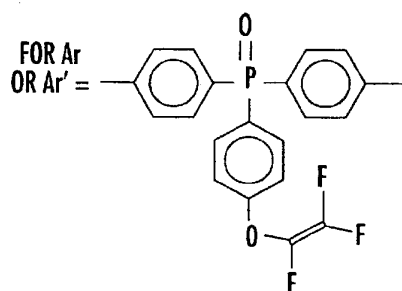


FIG. 2G.

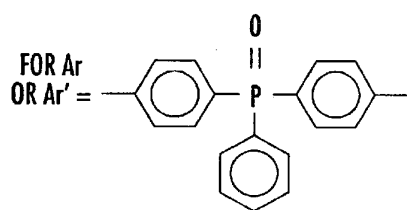


FIG. 2H.


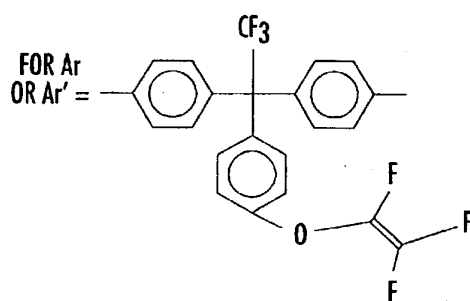


FIG. 2I.

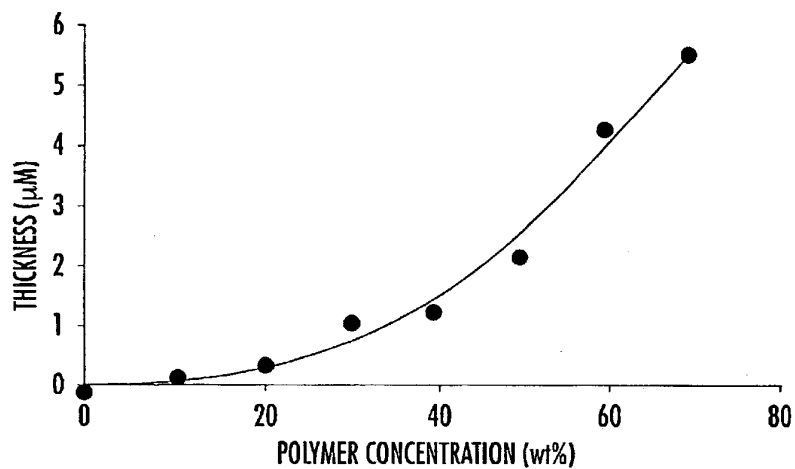

SPIN COATED FILM THICKNESS AT 600 RPM VS. WT.% COPOLYMER IN MESITYLENE FOR
COPOLYMER OF SPECIES OF FIGURE 2A/2B

FIG. 3.


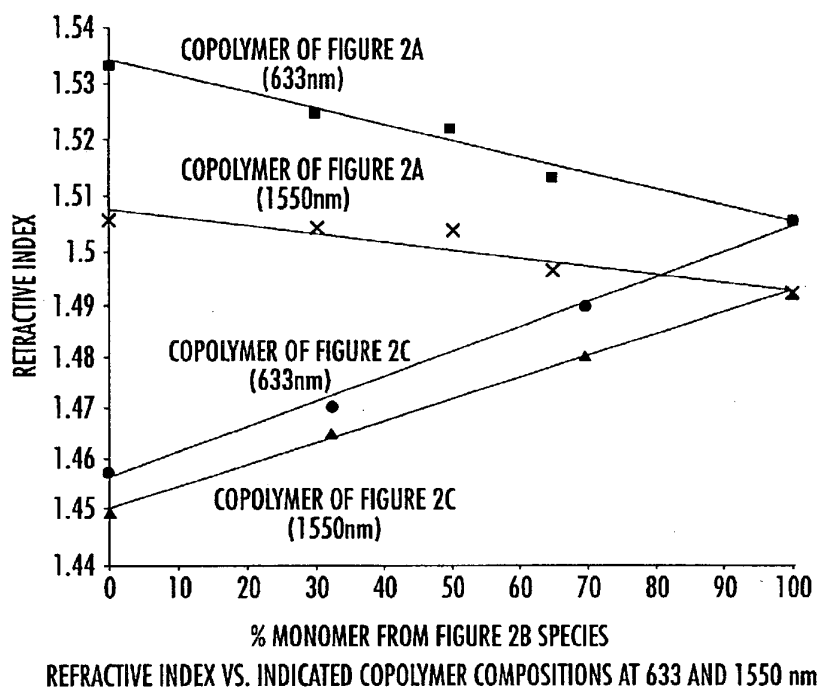


FIG. 4.

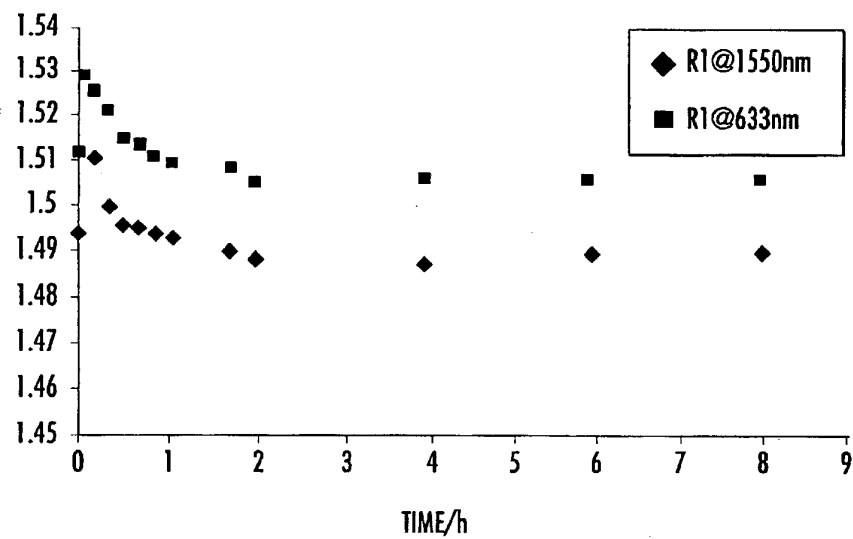

REFRACTIVE INDEX VS. CURE TIME AT 200°C FOR THE MONOMER OF FIGURE 2B

FIG. 5.